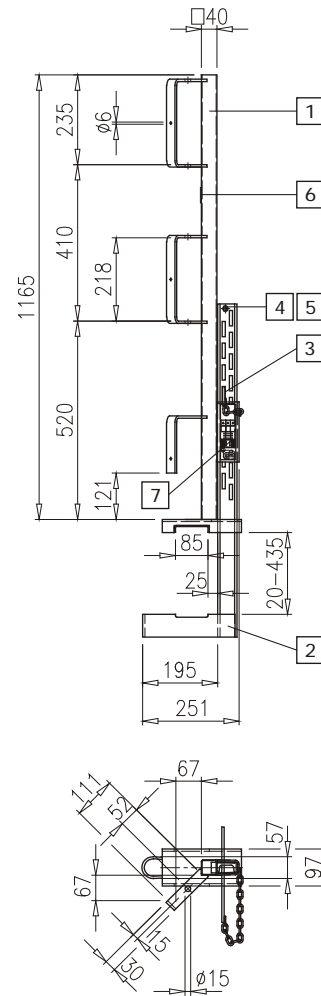
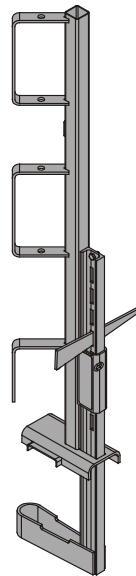


Handrail clamp S**11.4****580470000**

Schutzgeländerzwinge S

Galvanised / verzinkt

**List of components**

Teilleiste

Is used for erecting safety railings along exposed outer edges.

Can be clamped to platforms, floor-slab formwork, wall formwork and concrete floor-slabs.

Clamping range: from 20 to 435 mm.

It can be turned by 90° (enabling it to be clamped to the end of the beam either parallel or perpendicular to it). The 45°-angled loops mean that guard-rail boards can be inserted in either direction.

The additional drilled holes make it possible to mount screw-on couplers, for erecting guard rails using scaffolding tubes..

Pos.	Name Bezeichnung	Art. n° Teil-Nr.	Piece Stk.
1	Railing tube, complete	500470001	1
2	Height adjustment, complete	500470002	1
3	Wedge with chain	500470780	1
4	Hexagon screw M8x16 (DIN 933)	Id.Nr. 019830	1
5	Hexagon nut M8 self-locking (DIN 982)	Id.Nr. 019336	1
6	Label "Doka-Logo" 33x33mm	504381930	1
7	GS symbol structure "Handrail clamp S"	500470900	1

Feature(s) distinguishing new model from predecessor:
additional holes drilled in the loops for the guard-rail boards