

Wheel-around scaffold DF

Art.n° 586157000

1996 models onward



Basic drawings of product



- A Folding frames 0,75 m
- B Handrail frames
- C Batten 1,80 m
- D Horizontal brace
- E Wheel (incl. lock)

max. permitted load: 1,5 kN/m²
 dimensions: 0,75 m x 1,80 m
 max. height of platform: 1,50 m

Use for the designated purpose only:

The Wheel-around scaffold DF can be folded. It is made out of light metal (EN 1004:2004). Due to the adjustable height of the platform (1,50m max.), a height of up to 3,5m can be reached. In this range it is therefore ideal for striking Dokaflex.

It is very versatile because of quick erecting and dismantling combined with low storage capacity.



- It is forbidden to use the product for anything but its intended purpose!
- Doka accepts no liability for products that have been altered!
- Repairs may only be carried out by the manufacturer!
- Store lifting accessories in a dry and well ventilated place, protected from the weather and from all corrosive substances.
- Load-carrying equipment must be inspected once a year by an expert.

Before every use

- Check for any signs of damage or visible deformation.



Damaged or deformed parts that do not meet the following criteria must be withdrawn from use immediately:


- Crack-free and notch-free welds
- No deformation
- Rating plate must be in place and clearly legible

Delivery condition




Erection

- ▶ Unfold the hinged frame unit on the vertical frame parts.
- ▶ Both the folding hinges must completely latch into place.

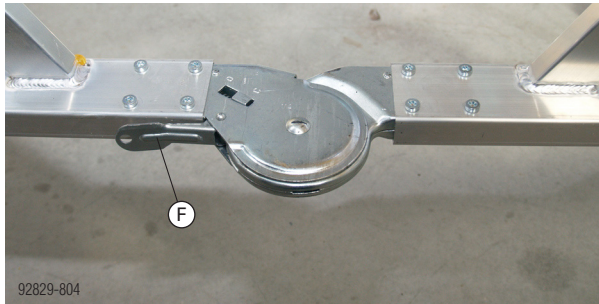

- ▶ Fix the wheels by using the lock.
- ▶ Create the platform by placing the batten at the required height.
- ▶ Brace scaffold at the 3rd rung from the bottom.
- ▶ Place handrail frames on top of the folding frames.
- ▶ Place both horizontal braces in order to connect the handrail frames.

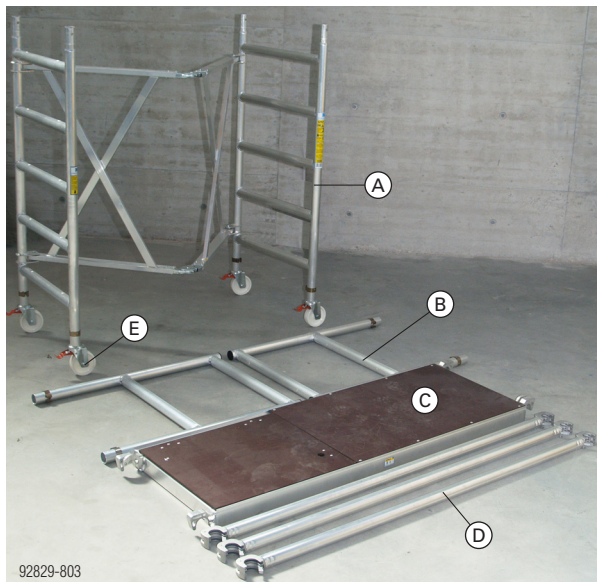

- A** Folding frames 0,75 m
- B** Handrail frames
- C** Batten 1,80 m
- D** Horizontal brace
- E** Wheel (incl. lock)
- F** Connections click

Ready to use

- ▶ The wheel-around scaffold is ready for use. To dismantle please follow the instructions in reverse order.



Caution:



- Erection of the Wheel-around scaffold DF is only allowed personnel which is familiar with the System.
- Damaged items are not to be used.
- Only genuine parts are to be used.
- The base must be flat and has to be able to carry the weight of the Wheel-around scaffold DF.
- While moving no personnel or tools are to be placed on top of the Wheel around scaffold DF.
- It is only allowed to move the Wheel-around scaffold DF by hand on a strong base with no barriers and just in longitudinal direction.
- Walking speed is not to be exceeded when moving.
- Before using make sure that the Wheel-around scaffold DF is erected according to the operating instructions. Make sure it is standing vertical.
- It is not permissible to lean over the side to reach too far for striking purposes.
- Spanning a walkway from the Wheel-around scaffold DF to e.g. brickwork is prohibited.
- The Wheel-around scaffold DF is to be fixed using the locks.
- Do not jump on or from the Wheel-around scaffold DF.