Handrail clamp S

11.45 **580470000**

Schutzgeländerzwinge S

Galvanised / verzinkt

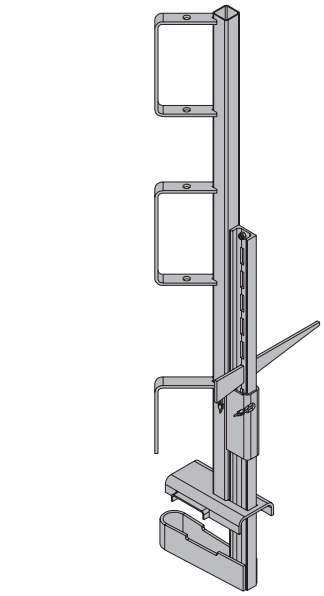

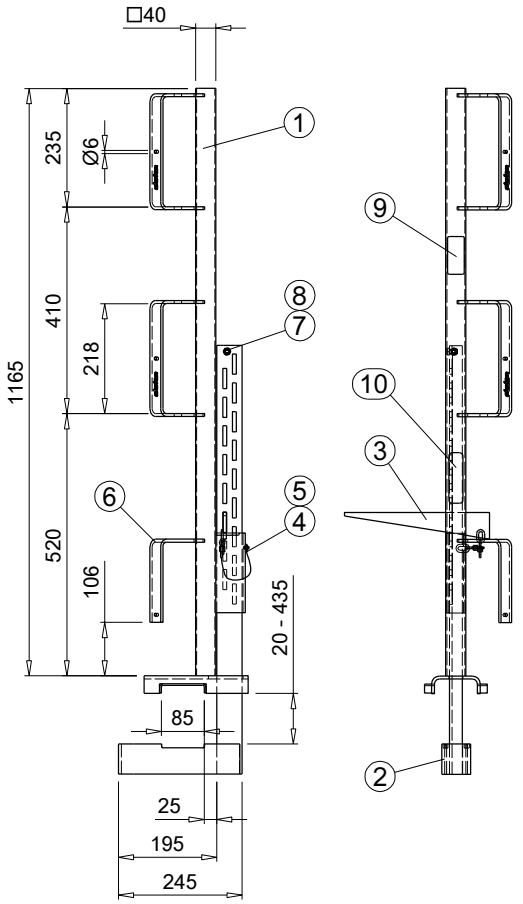

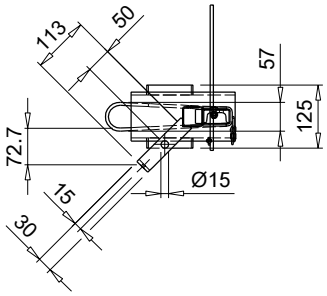

Is used for erecting safety railings along exposed outer edges.
Can be clamped to platforms, floor-slab formwork, wall formwork and concrete floor-slabs.
Clamping range: from 20 to 435 mm
It can be turned by 90° (enabling it to be clamped to the end of the beam either parallel or perpendicular to it). The 45°-angled loops mean that guard-rail boards can be inserted in either direction.
The additional drilled holes make it possible to mount screw-on couplers, for erecting guard rails using scaffolding tubes.

List of components
Teileliste

Pos.	Name Bezeichnung	Art. n° Teil-Nr.	Piece Stk.
1	Railing tube, complete	500470001	1
2	Railing tube, complete	500470002	1
3	Railing clamp wedge 288/6	506456003	1
4	Securing cable D3/450	506534100	1
5	Fastening clamp d3.5	504373030	2
6	Toe board clip galv.	500470730	1
7	Hexagon screw M8x16 (DIN 933)	ID n° 019830	1
8	Hexagon nut M8 self-locking (DIN 982)	ID n° 019336	1
9	Label "Doka-Logo" 75x33mm	508247910	1
10	Label "DGUV test 12245" 100x28mm	500470900	1

Noticeable feature differentiating new model from predecessor: chain replaced by securing cable.

archive archive archive archive archive archive archive archive archive archive archive archive archive archive